

High Reliability Surface Mount Ferrite Bead HRBSM3511S500 (Differential Mode)



Features


- Oxygen free high conductivity copper and Tin/Lead (Sn/Pb) solder plated terminals.
- Rugged construction with low DC resistance and increased current carrying capacity.
- Terminations are Tin/Lead (Sn/Pb) solder plating over Nickel (Ni) underplating.
- High Reliability with complete material and process traceability.
- Available with DLA 03024 group A, B data are supplied with each shipment.
- Group C inspection data is optional.

Applications

- Satellite/Spacecraft
- Aerospace
- Avionics
- Military
- Telecom DC/DC power
- Drones
- Battery and BMS
- PDU


Product Dimensions

Dimension	mm	mm Tol.	Nominal Inch	Inch Misc
A	2.90	Max	0.114	-
B	4.6	± 0.20	0.181	-
C	9.25	Max	0.35	-
D	1.50	± 0.50	0.059	-

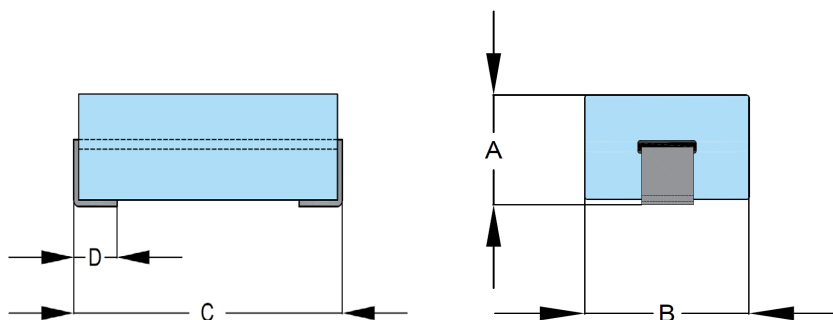

Land Pattern

Unit	V	W	X	Y
mm	5	8	1.80	3.00
Inch	0.197	0.315	0.071	0.118

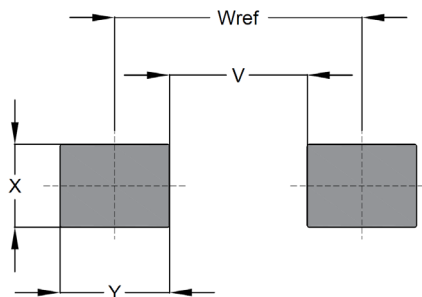


High Reliability Surface Mount Ferrite Bead HRBSM3511S500 (Differential Mode)

Electrical Charactersitics and General Specification:

Part Number	HRBSM3511S0500P	Max. Current Rating (A)	5 AMP
Typical Impedance (Ω)	50@ 10MHz 74@ 25 MHz* 114@ 100 MHz* 122@ 250 MHz	Wire Guage (AWG)	Flat TCW 1.27(.050)Wx0.2(.008)T
		Storage Temperature ($^{\circ}$ C)	-55 to +125 @RH<55%
		Operating Temperature($^{\circ}$ C)	-55 to +125
		Termination	Tin/Lead over nickel undercoating
Max. RDC (m Ω)	1.2	Ferrite Material	NiZn (43 Material)
Weight (g)	0.45		
Minimum Impedance (Ω)	45 Min. @25 MHz	76 Min. @100 MHz	

Part Number Identifier

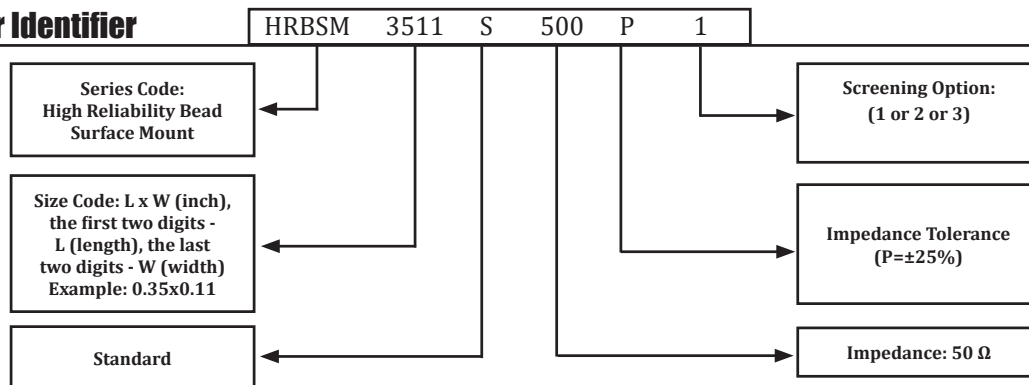

Standard Screening Options:

- 1- Standard 100% Visual Inspection and electric characterstics (Impedance/DC resistance Read and Record) per DLA 03024.
- 2- Option 2: Group A and B Screening per DLA 03024.
- 3- Option 3: Group A, B, and C Screening per DLA 03024.

Termination :

Tin/Lead (Sn/Pb) solder plating

High Reliability Surface Mount Ferrite Bead HRBSM3511S500 (Differential Mode)

Frequency vs. Impedance (Z), Resistance (R), Reactance (XL)

