


High Reliability Surface Mount Ferrite Bead HRBSM3712S430 (Differential Mode)

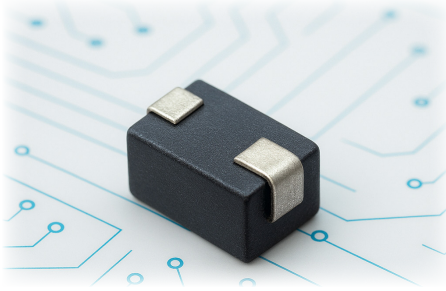

Applications


- Satellite/Spacecraft
- Aerospace
- Avionics
- Military
- Telecom DC/DC power
- Drones
- Battery and BMS
- PDU

Features

- Oxygen free high conductivity copper and Tin/Lead (Sn/Pb) solder plated terminals.
- Rugged construction with low DC resistance and increased current carrying capacity.
- Terminations are Tin/Lead (Sn/Pb) solder plating over Nickel (Ni) underplating.
- High Reliability with complete material and process traceability.
- Available with DLA 03024 group A, B data are supplied with each shipment.
- Group C inspection data is optional.


Product Dimensions

Dimension	mm	mm Tol.	Nominal Inch	Inch Misc
A	2.85	± 0.20	0.112	-
B	3.05	± 0.10	0.12	-
C	5.1	- 0.85	0.184	-
D	1.5	± 0.50	0.059	-

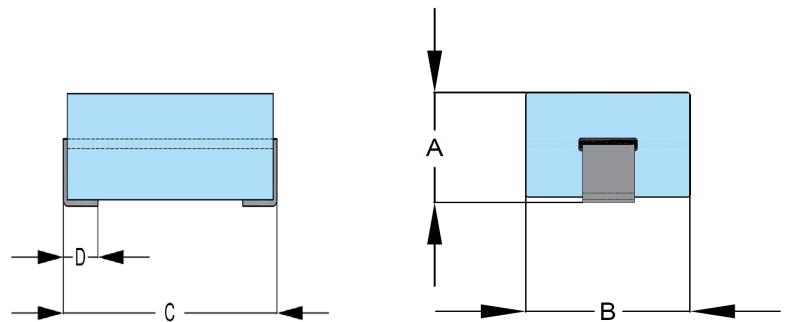

Land Pattern

Unit	V	W	X	Y
mm	1.00	4.00	1.80	3.00
Inch	0.040	0.157	0.071	0.118

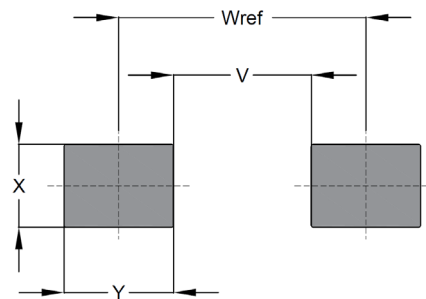


High Reliability Surface Mount Ferrite Bead HRBSM3712S430 (Differential Mode)

Electrical Characteristics and General Specification:

Part Number	HRBSM3712S430P1	Max. Current Rating (A)	5 AMP
Typical Impedance (Ω)	43 @ 100MHz* 58 @ 250 MHz* 68 @ 500 MHz* 77 @ 1000 MHz	Wire Gauge (AWG)	Flat TCW 1.27(.050)Wx0.2(.008)T
		Storage Temperature (°C)	-55 to +125 RH < 55%
		Operating Temperature(°C)	-55 to +125
		Termination	Tin/Lead over nickel undercoating
Max. RDC (mΩ)	0.8	Ferrite Material	NiZn (61 Material)
Weight (g)	0.15		
Minimum Impedance (Ω)	29 @100 MHz	39 @250 MHz	44 @500 MHz

Part Number Identifier

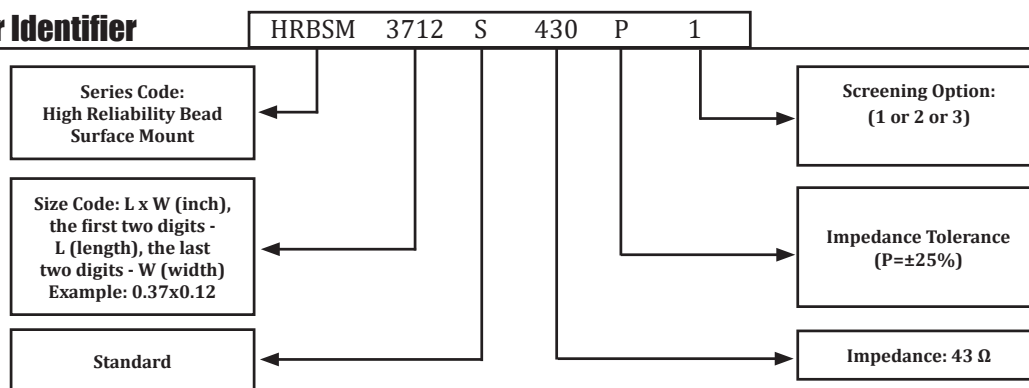

Standard Screening Options:

- 1- Standard 100% Visual Inspection and electric characteristics (Impedance/DC resistance Read and Record) per DLA 03024.
- 2- Option 2: Group A and B Screening per DLA 03024.
- 3- Option 3: Group A, B, and C Screening per DLA 03024.

Termination :

Tin/Lead (Sn/Pb) solder plating

High Reliability Surface Mount Ferrite Bead HRBSM3712S430 (Differential Mode)

Frequency vs. Impedance (Z) , Resistance (R), Reactance (XL)

