


HRF0603HI SolidMatrix Surface Mount Fuse (Hi InRush, 0603 Size)

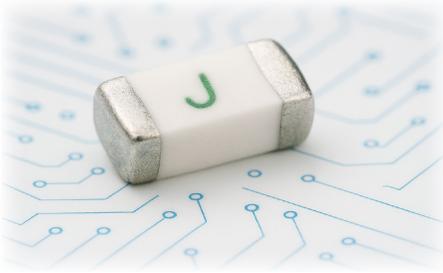


Features

- Tin/Lead (Sn/Pb) solder plated terminals.
- High inrush current withstanding capability.
- Single small case size for current rating from 1A to 8A.
- Ceramic monolithic body structure.
- Silver fusing element and silver termination with Ni and Sn/Pb solder plating.
- Symmetrical design and reliable functionality throughout prolonged use.

Clearing Time Characteristics

% Of Current Rating	Clearing Time @25°C	
	Min.	Max.
100%	4 hours	
200%	1 second	60 seconds
1000% (1-5A)	0.0002 seconds	0.02 seconds

Derating Curve

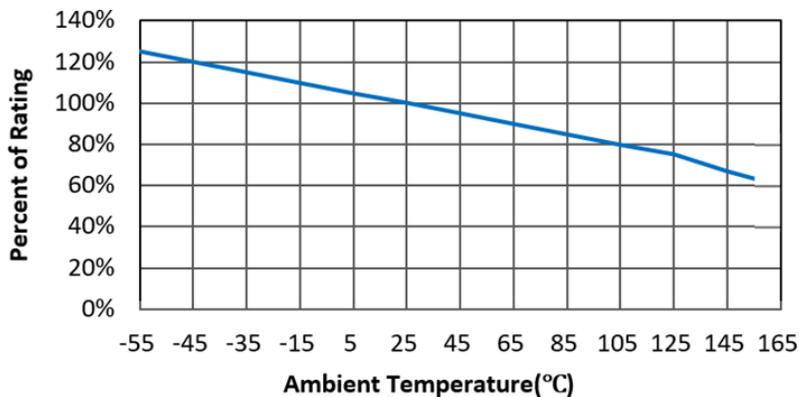


Applications

- Satellite/Spacecraft
- Aerospace
- Avionics
- Military
- Telecom DC/DC power
- Drones
- Battery and BMS
- PDU


Product Dimensions

Dimension	Inch	mm
L	0.063 ± 0.006	1.60 ± 0.15
W	0.031 ± 0.006	0.80 ± 0.15
T	0.031 ± 0.006	0.80 ± 0.15
B	0.014 ± 0.006	0.36 ± 0.15

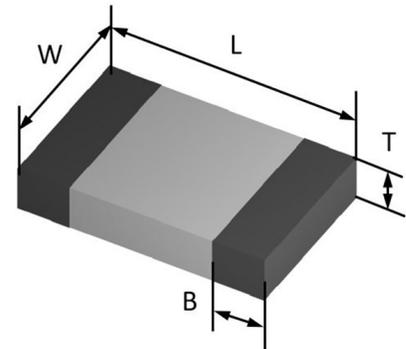

Recommended Land Pattern

Dimension	0603	Unit
L	0.087 (2.20)	Inch (mm)
G	0.031 (0.80)	Inch (mm)
H	0.039 (1.00)	Inch (mm)

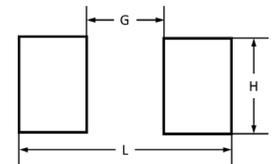


HRF0603HI SolidMatrix Surface Mount Fuse (Hi InRush, 0603 Size)

Electrical Characteristics

Part Number	Voltage Rating (VDC)	Current Rating (Amps)	Interrupting Rating	Nominal Cold DCR (Ω)/1	Nominal I^2t (A^2s)/2	Marking Code/3
HRF0603HI1000V032Tx	32	1.0	50A at rated voltage	0.210	0.08	E
HRF0603HI1500V032Tx	32	1.5		0.101	0.11	G
HRF0603HI2000V032Tx	32	2.0		0.057	0.24	I
HRF0603HI2500V032Tx	32	2.5		0.042	0.56	J
HRF0603HI3000V032Tx	32	3.0		0.030	0.72	K
HRF0603HI3500V032Tx	32	3.5		0.022	1.10	L
HRF0603HI4000V032Tx	32	4.0		0.018	2.08	M
HRF0603HI4500V032Tx	32	4.5		0.014	2.63	T
HRF0603HI5000V032Tx	32	5.0		0.013	3.25	N
HRF0603HI6000V032Tx	32	6.0	70A at rated voltage	0.010	4.00	O
HRF0603HI7000V032Tx	32	7.0	80A at rated voltage	0.008	5.00	P
HRF0603HI8000V032Tx	32	8.0		0.006	7.00	R

1- Measured at $\leq 10\%$ rated current and 25°C ambient. 2- Melting I^2t at 1000% of current rating. 3- Green marking code

Part Number Identifier

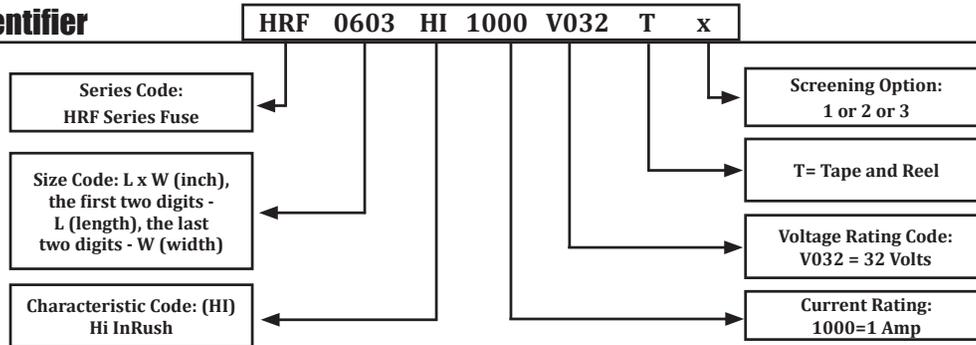

Standard Screening Options:

- Standard 100% Visual Inspection per MIL-PRF-23419/14, AS9102 FAIR, MIL-STD-1580 DPA.
- Option 2: Group A and B Screening per MIL-PRF-23419/14, AS9102 FAIR, MIL-STD-1580 DPA (see AEM Detail Specification for more details).
- Option 3: Group A, B, and C Screening per MIL-PRF-23419/14, AS9102 FAIR, MIL-STD-1580 DPA (see AEM Detail Specification for more details).

Termination :

Tin/Lead (Sn/Pb)

General Specification:

- Operating temperature: -55°C to +150°C (With de-rating).
- Storage Temperature: -55°C to +150°C.
- Moisture sensitivity level: MSL=1.



Certified to
AS9100D
ISO 9001:2015




HRF0603HI SolidMatrix Surface Mount Fuse (Hi InRush, 0603 Size)

Reliability Tests:

No.	Item	Condition	Criteria
1	Bend	2mm bend	DCR change within $\pm 20\%$. ($\pm 10\%$ for $\leq 1A$), no mechanical damage
2	Solderability	245°C, 5 seconds	New solder coverage $\geq 95\%$
3	Soldering Heat Resistance	260°C, 60 seconds	DCR change within $\pm 10\%$, new solder coverage 75% minimum, no mechanical damage
4	Terminal Strength	Gradually apply 0.5 kg force to the side of the part for 60 seconds	DCR change within $\pm 10\%$, no mechanical damage
5	Life	80% rated current (75% for $< 1A$), 2000 hours, ambient temperature +20°C to +30°C	Voltage drop change within $\pm 10\%$
6	Thermal Shock	-65°C to +150°C, 100 cycles	DCR change within $\pm 10\%$, no mechanical damage
7	Mechanical Vibration	5 - 3000 Hz, 0.4 inch double amplitude or 30 G peak	DCR change within $\pm 10\%$, no mechanical damage
8	Mechanical Shock	1500 G, 0.5 milliseconds, half-sine shocks	DCR change within $\pm 10\%$, no mechanical damage
9	Salt Spray	5% salt solution, 48 hours exposure	DCR change within $\pm 10\%$, no excessive corrosion
10	Moisture Resistance	10 cycles	DCR change within $\pm 10\%$, no excessive corrosion

HRF0603HI SolidMatrix Surface Mount Fuse (Hi InRush, 0603 Size)

Average Pre-arcing Time Curves

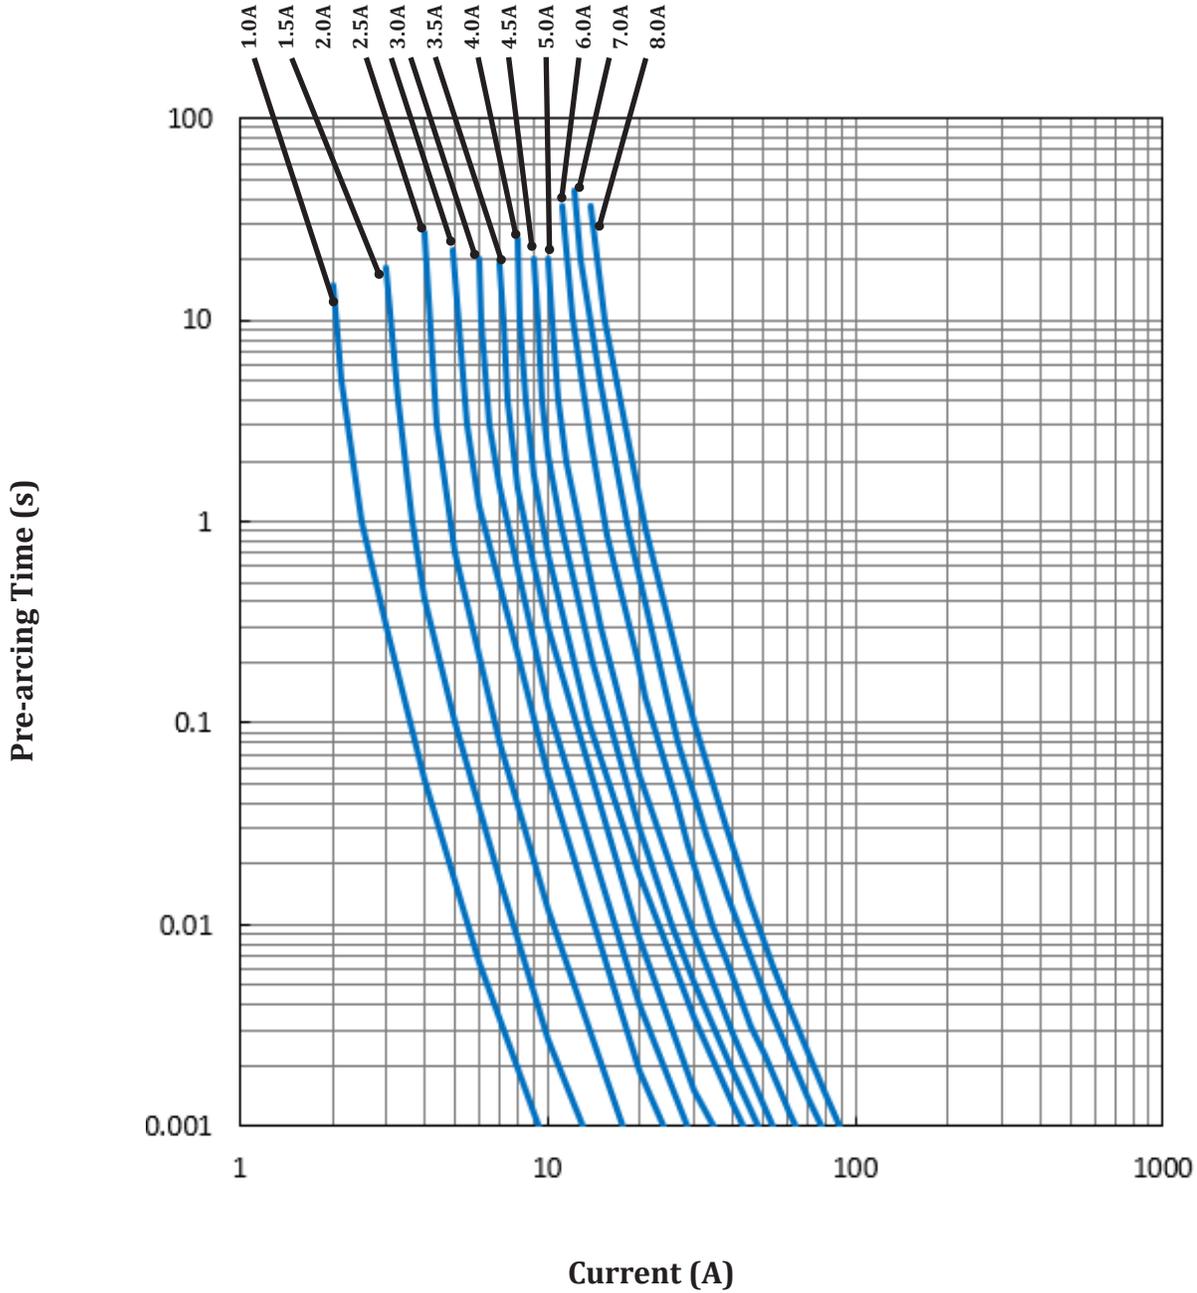

HRF0603HI SolidMatrix Surface Mount Fuse (Hi InRush, 0603 Size)

Average I²t vs. t Curves

